



MULTIWAY TERMINAL BLOCKS

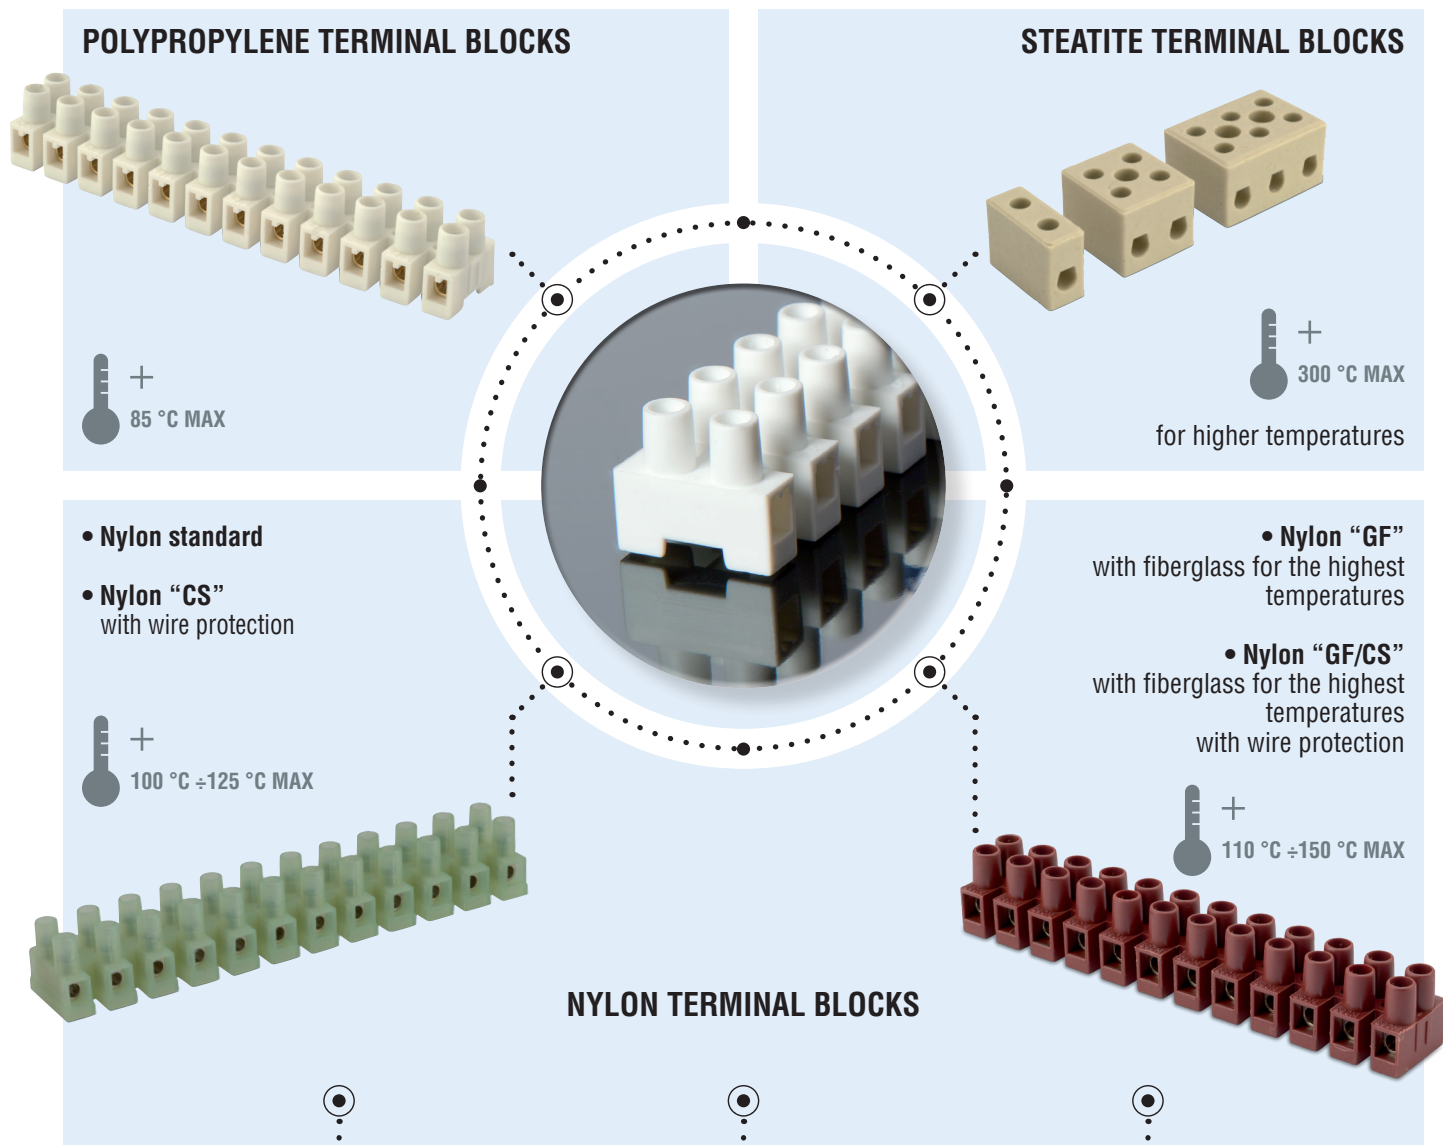


Number of poles
1 to 12

More insulating
base types


Customizable
marking




FLAT



FAST CLAMP




RAISED



WITH GROUND CONNECTION

MULTIWAY TERMINAL BLOCKS · POLYPROPYLENE · 12 WAYS · 920 SERIES



INSULATING HOUSING: polypropylene (PP) natural color

CONDUCTIVE BODY: brass

CAPTIVE SCREW IN: galvanized steel

INSULATION SELF-EXTINGUISHING: EN 60335-1: 2002+A2:2006 (par. 30.2.3), EN 60695-2-10 a 850 °C, EN 60695-2-11

CONDUCTOR TYPE: rigid and flexible

MAX OPERATING TEMPERATURE: 85 °C

TEST VOLTAGE: 2500 V (9200, 9201, 9202, 9203), 3000 V (9204)



PROTECTION GRADE: IP20

ACCORDING TO STD.: EN 60998-1: 2004, EN 60998-2-1: 2004, EN 60335-1: 2002 + A2: 2006 (Par. 30.2.3), IEC/EN 60695-2-11

Code	Section (mm²)		Rated voltage (V)	Test current (A)	Stripping length (mm)	Screw	Torque (Nm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	W1 (mm)	W2 (mm)	S1 (mm)	S2 (mm)	D1 (mm)	D2 (mm)	
9200	2,5		400	24	5	M3	0,25	93,7	8	5,6	5,6	16	6	14,7	9	3	2,2	50/700
9201	4		400	32	7	M3	0,25	116,5	10	6	6	20,5	10	17,2	9,5	3,1	3,1	50/500
9202	6		400	41	7,5	M3.5	0,4	139,5	12	7,5	7,5	23,5	10	20,1	11,8	4,2	3,6	50/300
9203	16		450	76	8,5	M4	0,7	175,5	15	10,5	10,5	25,3	11	22,5	13	6	4,1	25/200
9204	25		500	101	11,5	M5	0,8	228	19,5	14	14	35,2	15	33,5	19	7,2	4,1	10/80



MULTIWAY TERMINAL BLOCKS · NYLON · FROM 1 TO 12 WAYS · M092 SERIES

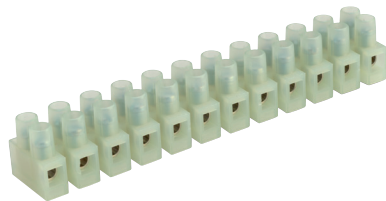

Standard version of the M092 series

INSULATING HOUSING: polyamide (PA 6.6) natural color UL 94 V2

CONDUCTIVE BODY: nickel-plated brass

CAPTIVE SCREW IN: galvanized steel (M3)

INSULATION SELF-EXTINGUISHING: EN 60695-2-10 a 850 °C

CONDUCTOR TYPE: rigid and flexible

TEST VOLTAGE: 2500 V

STRIPPING LENGTH: 5 mm

PROTECTION GRADE: IP20

ACCORDING TO STD.: EN 60998-1: 2004, EN 60998-2-1: 2004

	Section (mm ²)	Section (AWG)	Rated voltage (V)	Test current (A)	Max operating temperature (°C)	Torque (Nm)
	2,5	-	250/380	24	125	0,25
	-	20-16	600	10 (*)	105	0,5

* 15 A rated for Factory Wiring Only

Code	Ways	Color	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	W1 (mm)	W2 (mm)	S1 (mm)	S2 (mm)	D1 (mm)	D2 (mm)	
92/1	1	☐ Natural	5,6 ± 1	8	5,5	2,5	15,2	6	15,3	8,7	3	2,6	Contact BM
92/2	2	☐ Natural	13,5 ± 1	8	5,5	2,5	15,2	6	15,3	8,7	3	2,6	
92/3	3	☐ Natural	21,5 ± 1	8	5,5	2,5	15,2	6	15,3	8,7	3	2,6	
92/4	4	☐ Natural	30 ± 1	8	5,5	2,5	15,2	6	15,3	8,7	3	2,6	
92/5	5	☐ Natural	37,5 ± 1	8	5,5	2,5	15,2	6	15,3	8,7	3	2,6	
92/6	6	☐ Natural	45,5 ± 1	8	5,5	2,5	15,2	6	15,3	8,7	3	2,6	
92/7	7	☐ Natural	54 ± 1	8	5,5	2,5	15,2	6	15,3	8,7	3	2,6	
92/8	8	☐ Natural	61,5 ± 1	8	5,5	2,5	15,2	6	15,3	8,7	3	2,6	
92/9	9	☐ Natural	69,5 ± 1	8	5,5	2,5	15,2	6	15,3	8,7	3	2,6	
92/10	10	☐ Natural	77,5 ± 1	8	5,5	2,5	15,2	6	15,3	8,7	3	2,6	
92/11	11	☐ Natural	85,5 ± 1	8	5,5	2,5	15,2	6	15,3	8,7	3	2,6	
M092	12	☐ Natural	93,5 ± 1	8	5,5	2,5	15,2	6	15,3	8,7	3	2,6	50/700

   file n° E 70156

**HALOGEN
FREE**